

HILTI

50 X-EKSC 40 MX

386470


Made in Slovenia









Info | Shop



qr.hilti.com/386470



CE
16
Hilti AG
FL-9494 Schaan
Hilti-DX-DoP-005
ETA-16/0301
EAD 330083-03-0601
0672
0672-CPR-0624
Power-actuated fastener for multiple use in concrete for non-structural applications

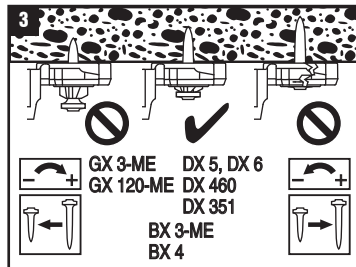

UL US
LISTED
POSITION DEVICE
50PM

Temperature rating 65 °C (149 F),
for indoor use, suitable for use in air
handling spaces in accordance with
Sec. 300-22(c) and (d) of the
National Electrical Code.

2079623-2025.08.21